


Load Cable Terminations


A copper bus is provided to land load cables. All cables terminated with 3/8" bolts. Provisions for 2-hole lugs on both 1" and 1-3/4" centers are provided. The number of cables that can be terminated varies by disconnect ampere rating as follows:

- Disconnects rated 100 through 750 amp – 3 cable landings is standard. Optional 4 cable bus is available.
- Disconnects rated 800 through 2400 amp – 4 cable landings is standard. Optional 6 cable bus is available.

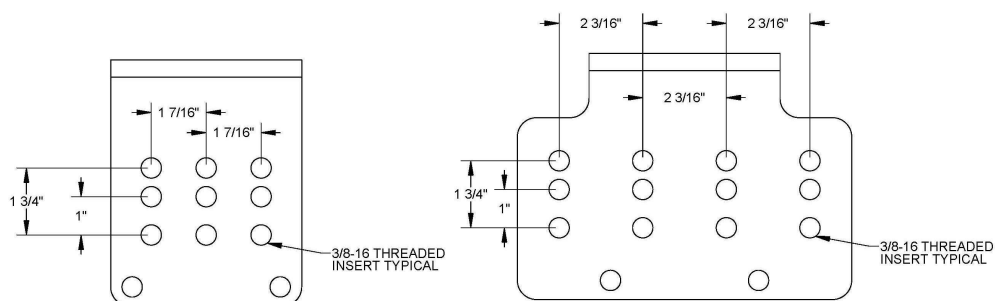

Standard Load Cable Detail
For Disconnects Rated
100 through 750 AMP

Optional Load Cable Detail
For Disconnects Rated
100 through 750 AMP

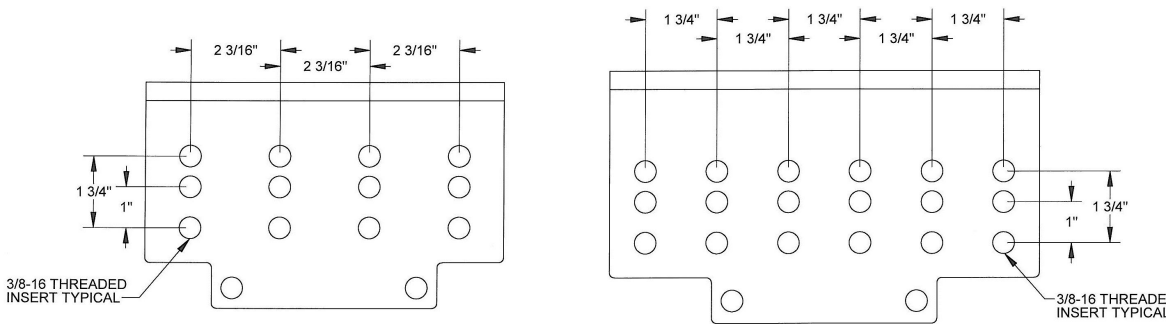

Standard Load Cable Detail
For Disconnects Rated
800 through 2400 AMP

Optional Load Cable Detail
For Disconnects Rated
800 through 2400 AMP